

**116<sub>Kg</sub>**  
Weight

**2.200<sub>L</sub>**  
Capacity

**880<sub>Kg</sub>**  
Nominal load

**1180<sub>mm</sub>**  
Loading height



### FEATURES

The body and lid are injection moulded in solid coloured high-density polyethylene.

Manufactured using environmentally-friendly recyclable materials.

No heavy metals in the pigments.

Ideal for different types of waste collection: glass, plastics & packaging...

Reduce-height apertures at 1180 mm above the ground, with sizes and features specially designed to accommodate each type of waste.



Lid opens as far as 80 degrees (1254 mm) for waste disposal.

Customisation of body and lid by thermal transfer or silk screen graphic. Maximum area on the body: 400 mm x 300 mm.

Polished surfaces which prevent waste from sticking.

Product approval certificate awarded by TÜV Product Service GmbH in accordance with European regulation EN 12574

### STANDARDS

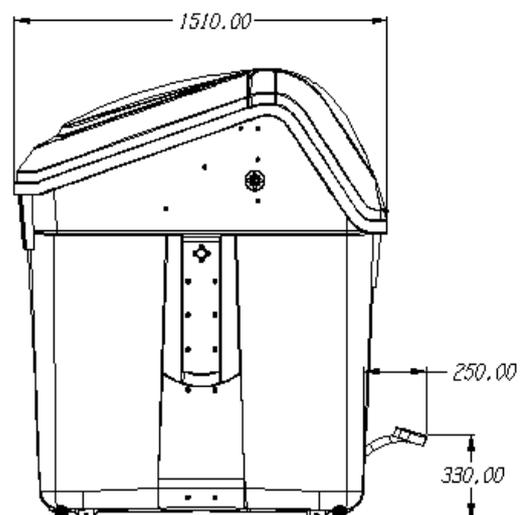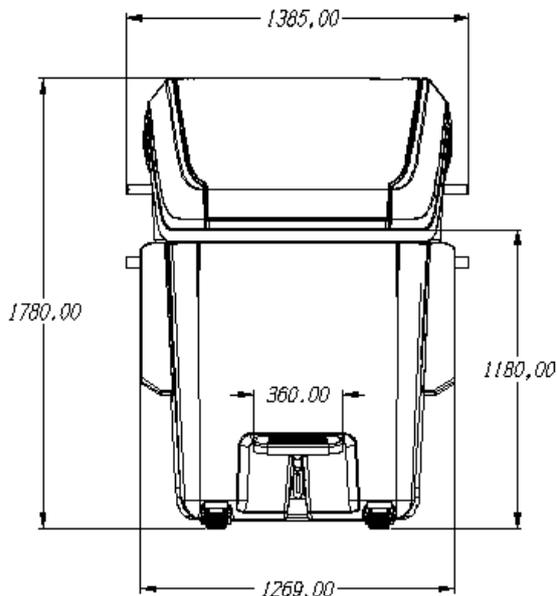

### ATRIBUTTES



INNOVATION



DESIGN



ACCESIBILITY

### ACCESSORIES



GLASS APERTURE



FILL CONTROL SYSTEM



REFLECTIVE STRIPS



ACCESIBLE ELEMENTS



CUSTOMIZATION



ACCESS CONTROL


Available in a wide range of colours.



### EQUIPMENT

Recess for electronic chips.

Can be equipped with a range of accessories providing real solutions to every requirement: lid-lifting pedal and lever, RFID chip, shock absorber, reflective strips, access control system, fill control system, temperature control system, alignment system, designed with plenty of space for customization.



Electronic chip



Accessible



Access control



Temperature control



Alignment system



Fill system control