

660 l.
770 l.
1.100 l.
Capacity

660: 264 Kg
770: 308 Kg
1100: 400 Kg
Nominal load

160 / 200 mm
Wheel diameter



FEATURES

The body and lid are injection moulded in solid coloured high-density polyethylene stabilised against the combined effects of UV radiation and water.

High-density polyethylene makes the product highly resistant to atmospheric conditions and gives it great stability against fluctuations in temperature.

Manufactured using environmentally-friendly recyclable materials.

There are no heavy metals in the pigments.

Stable colours and total corrosion resistance.


Universally accessible rear loading containers are available in four different sizes: 660, 770, and 1,100 litres.

The containers are designed with clearly marked waste apertures and instructions on how to use them.

Diagrams and text indicating the type of waste.

Pictogram based on the PICOL system (Pictorial Communication Language).

STANDARDS

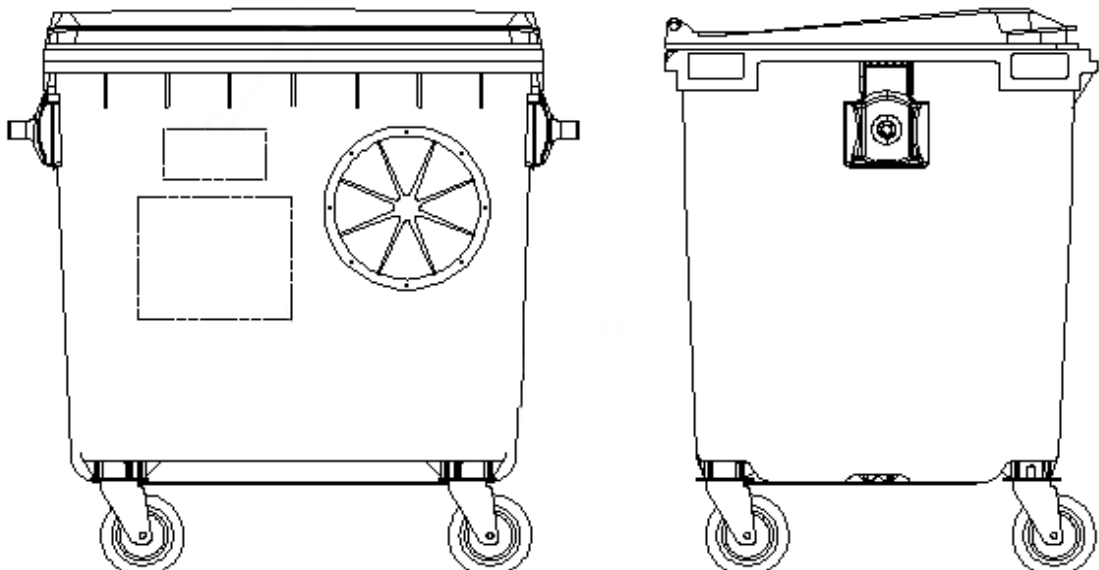


ATTRIBUTES



QUALITY



ACCESSIBLE



FUNCTIONALITY



CUSTOMISATION



ACCESSIBLE APERTURE

EQUIPMENT

160 / 200 mm diameter wheels.


Openings with sizes and features specially designed to accommodate each type of waste, making them easy to use.

Integrated sound-proofing system in the lid.


Recess for electronic chips




Accessible




Braille




Easy to stack



Easy to clean



Easy to handle



Resistant to atmospheric conditions