

1100_L

440_{Kg} Nominal load

200 mm Wheels diameter



FEATURES

The body and lid are injection moulded in solid coloured high-density polyethylene.

Manufactured using environmentally-friendly recyclable materials.

No heavy metals in the pigments.

Ideal for different types of waste collection: paper and cardboard, glass, packaging, organic matter, etc. . . .

Available in a wide range of colours..

DIN, AFNOR, OSCHNER or VENTRAL lifting systems.

Customisation of lid with thermal transfer graphic, area: 230×45 mm.

Customisation of body with silk screen or thermal transfer graphic, area: 300×400 mm.


CE Marking with sound power level indicated in accordance with European Directive 2000/14/EC. 90,9 db.

UN certificate for the transportation of hazardous goods.

Product Approval Certificate awarded by TÜV Product Service GmbH in accordance with European Standard EN 840 and specifications of RAL-GZ 951/1.

STANDARDS



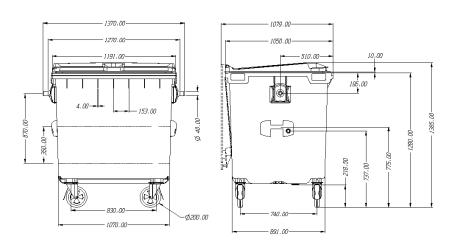

These dimensions are subject to the tolerances given in EN 840-1:2012.





ATTRIBUTES







ACCESSORIES







PLASTIC APERTURE



PAPER APERTURE



CENTRAL BRAKE SYSTEM



LIFTING SYSTEM



HANDLE



PEDAL



AVAILABLE IN A WIDE RANGE OF COLOURS

EQUIPMENT

200 mm diameter wheels.

Openings with sizes and features specially designed to accommodate each type of waste, making them easy to use.

Integrated sound-proofing system in the lid.

Integrated handles in the body and lid for easy handling.

Recess for electronic chips.

Can be equipped with a range of accessories providing real solutions to every requirement: pedal-operated lid opening, reflective strips, lock, side handle.



Sound-proofing



Lock



Easy to stack



Easy to clean



Brake



Shock absorber